

# MAE Flameproof Alternator 4X Status 12V HI-AMP

## **Dual Power Output**

PART NO: MAEF1215/HA4XDO





- Flameproof & dust proof.
- 12 and 24 Volts configurations available.
- Dual power output
- ❖ 500W / 600W
- Self-exciting.
- Error detecting and lock-out protections.(See Datasheet)
- Error Logs recorded.
- Communications IR interface. (MAEIR Handheld)
- Indicator charge pilot light.
- Various pulley configurations available.
- Fan Protection guard: IP10 and IP20.
- Various cable entries back covers available.
- IA certification.

### • Technical Specifications


Output Power	500W / 600W
Output Voltage	13,7V
Certificate	M-XPL_15.0216X (IECEX) SIRA 02ATEX1255(ATEX) IP68
Min Alternator Speed	4000 RPM
Max Alternator Speed	12000 RPM
Weight	23kg
Overall Length	258mm
Overall Diameter	164mm


M-003-16-03

MAE Flameproof Alternator Dual Power Output 4X Status 12V HI-AMP

#### **NOTE**

To request a detailed Technical Specification Datasheet please

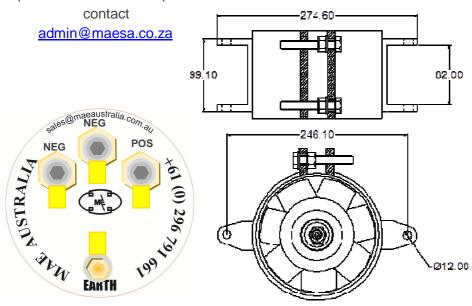



**Dual Power Output Connections Terminals** 

## **Application**



CONTINUOUS

















**APPLICATIONS** 



M-003-16-03

DRILLS

MAE Flameproof Alternator Dual Power Output 4X Status 12V HI-AMP

16 June 2017 M-003-16-03-FS-06 Page 2 of 3



### Summary

The MAE 4X Flameproof Alternator Dual Power Output (500W / 600W 12V) incorporates a log error detection-lockout protection system. It is compact and robust in design, with low maintenance required and is suitable for hazardous environment zone **Ex d I Mb**.

This alternator is certified with the following global approvals:

- TÜV (Australia)
- ❖ IECEX (South Africa) EXPLOLABS

#### Disclaimer

The information in this specification is derived from the latest model available at the time of issue 1.0. While every precaution has been taken to ensure the accuracy of the content, no responsibility can be accepted for any errors or omissions nor any misinterpretation or misapplication. MAE has adopted a continuous product improvement policy and therefore, specifications are subject to change without prior notice © September 2009 MAE all rights reserved.

Address: 23 Kemston Avenue,

Benoni 1501 Gauteng South Africa Tel: +27 011 421 5551 Fax: +27 011 421 5618

Email: orders@maesa.co.za admin@maesa.co.za sales@maesa.co.za

M-003-16-03

MAE Flameproof Alternator Dual Power Output 4X Status 12V HI-AMP

**M-003-16-03-FS-06** 16 June 2017 **Page 3 of 3**